

QUAD-LOCK®

Building Systems



Product Catalog

Table of Contents

Quad-Lock System Components	
Panels.....	3-4
Quad-Lock Wall Configurations.....	5
Standard Ties.....	6
Wire Top Ties.....	6
Specialty Ties.....	7
Slab Ties & Bracket System.....	7
Metal Brackets.....	8
Metal Tracks.....	9
Track Fastener.....	9
Quad-Deck.....	10
Double Rebar Chairs.....	11
EPS Plugs.....	11
EPS Top Hats.....	11
Available Accessories	
Self-Adhering Membrane.....	12
Bracing.....	12
Window Fasteners.....	12
Ledger Connections.....	13
Order Process.....	14
Shipping Configurations.....	15
Pallet Specifications.....	16
Order Form.....	17
Technical Information & Reference Guides.....	18
Notes.....	19
Contact Information.....	20

North America:

19402 - 56 Ave
Surrey, BC V3S 6K4 Canada
www.quadlock.com

Tel: 604.590.3111 Toll Free: 888.711.5625

Fax: 604.534.1212

Email: info@quadlock.com

Europe:

Blumenstr. 1
80331 München, Germany
www.quadlock.de


Tel: +49 (0) 89.260.3066

Fax: +49 (0) 89.260.8471

Email: service@quadlock.de

Quad-Lock System Components: Panels

Quad-Lock Panels are shape-molded out of fire-retardant expanded polystyrene (EPS). Each panel is 48" long x 12" tall [1219mm x 305mm] scored and slotted every 2" [50mm] for easy measuring, cutting and tie placement. See page 14 for packaging and weights.

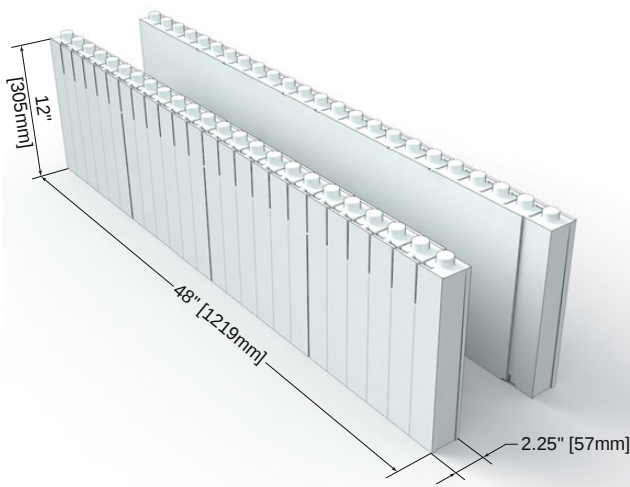


Regular Panel Pair

Each Panel is 2¼" [57mm] thick
5 panel pairs/bag (10 panels) | 16 bags/pallet
Part #: **QPX2** (Represents 2 individual panels)



Recommended for use by experienced Quad-Lock installers for space savings (livable area & freight) and for short stem walls.

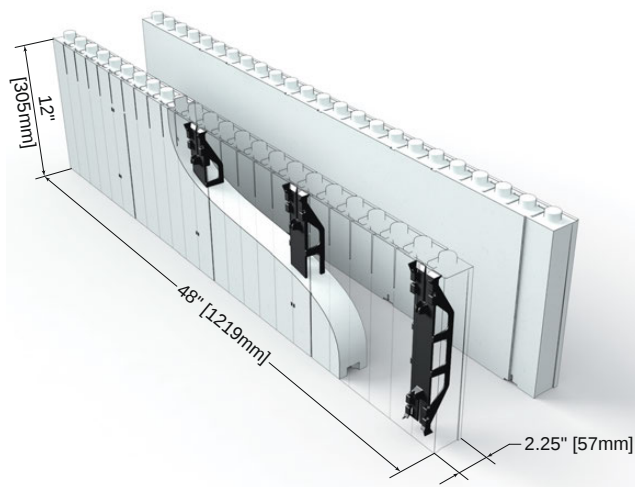


Regular FS Panel Pair Special Order Item*

Same as Regular Panels, except with 1½" [38mm] Fastening Strips embedded every 12" [305mm]
5 panel pairs/bag (10 panels) | 16 bags/pallet
Part #: **QPX2FS** (Represents 2 individual panels)



Use FS Panels for lapped siding or other finish requiring a continuous vertical fastening surface. FS Panels are recommended for commercial projects.

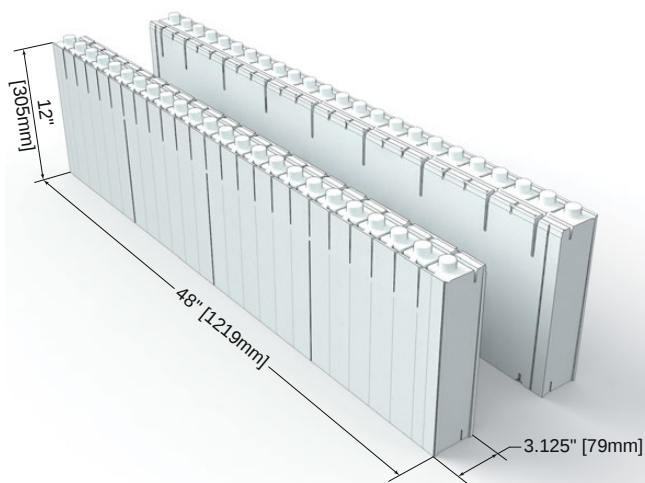


Ultra Panel Pair

Each Panel is 3⅝" [79mm] thick
4 panel pairs/bag (8 panels) | 12 or 16 bags/pallet
Part #: **QPX3** (Represents 2 individual panels)



QPX3 Panels are about 20% stronger than Regular Panels and add 27% more insulation value.

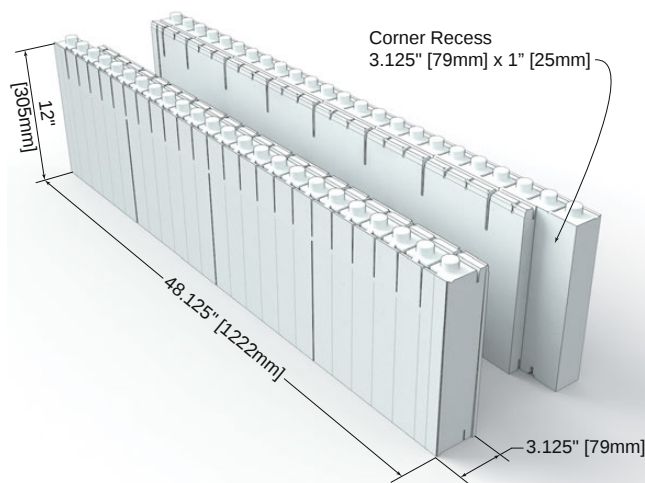


Ultra Corner Panel Pair

Same as Ultra Panels, except with a 1"x3" [25mm x 76mm] Full Height Recess
4 panel pairs/bag (8 panels) | 12 or 16 bags/pallet
Part #: **QPX3CORNER** (Represents 2 individual panels)

*Special orders or minimal stock - ask for lead times!

Quad-Lock System Components: Panels

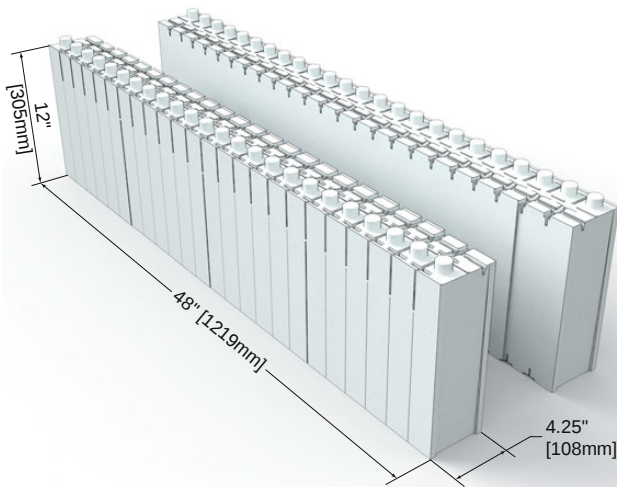


■ Plus Panel Pair **Special Order Item***

Each Panel is 4¼" [108mm] thick
3 panel pairs/bag (6 panels) | 12 bags/pallet
Part #: **QPX2PLUS** (Represents 2 individual panels)




Use Plus Panels for wall width transitions or for additional R-Value.

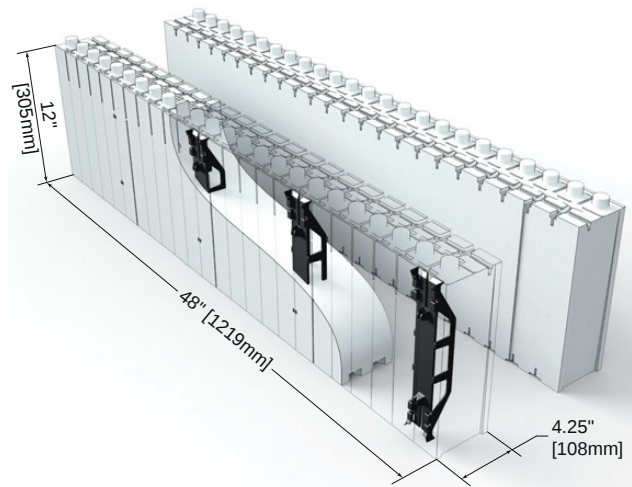

■ Panel Pair – Plus FS **Special Order Item***

Same as Plus Panels with 1½" [38mm] Fastening Strips embedded every 12" [305mm] on center
3 panel pairs/bag (6 panels) | 12 bags/pallet
Part #: **QPX2PLUSFS** (Represents 2 individual panels)

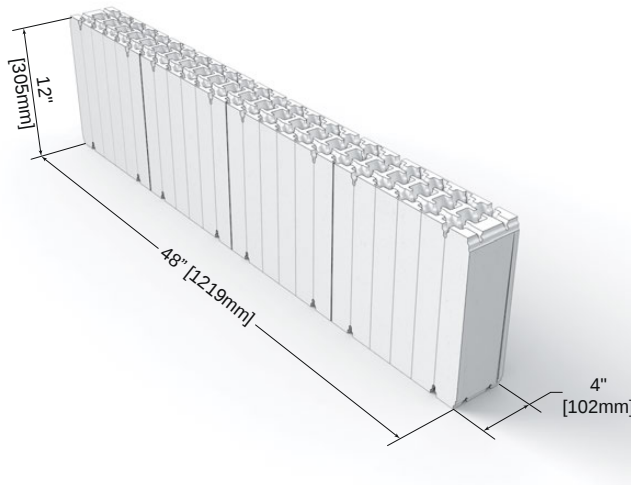

■ Extra Panel **Special Order Item***


Extra Panels are used to add insulation value to the existing panels. They are reversible (in all directions) and are added to the inside of the Regular, Ultra, Plus or FS Panels.
4" [102mm] thick
6 panels/bag | 12 bags/pallet
Part #: **QPXEXTRA** (Represents 1 individual panel)

*Special orders or minimal stock - ask for lead times!


Quad-Lock Wall Configurations




R-22 [RSI-3.83]

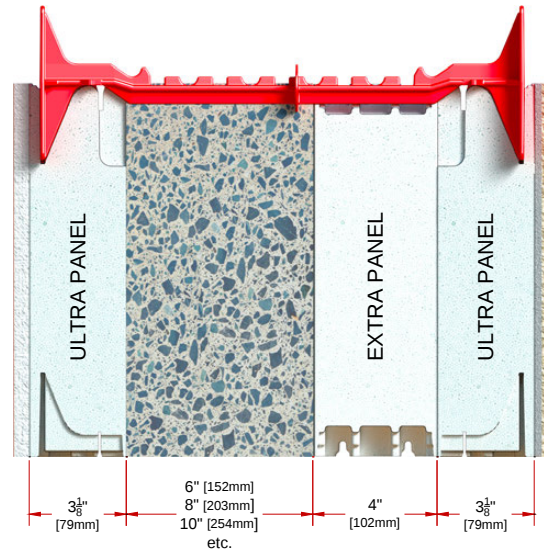


R-43 [RSI-7.49]

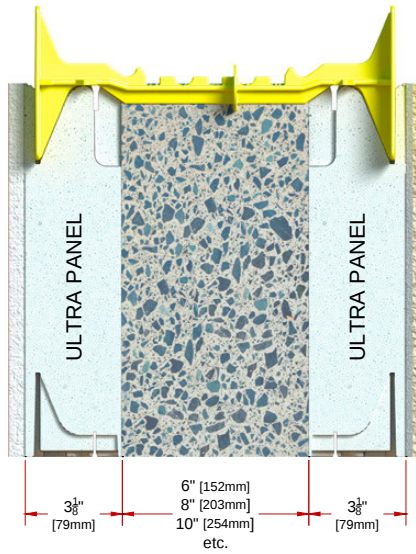


R-28 [RSI-4.85]

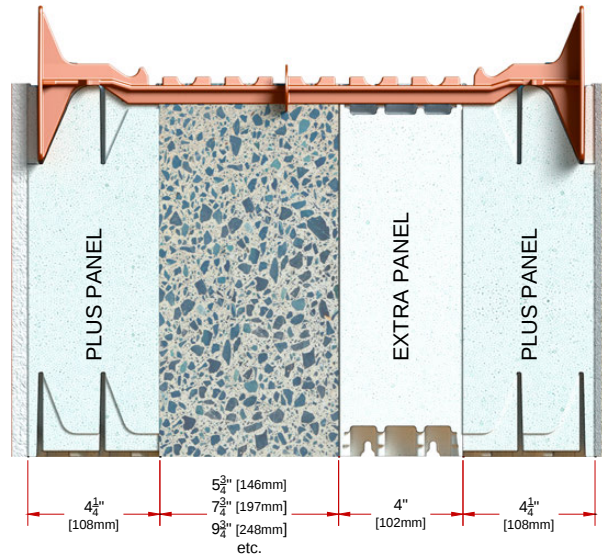

R-53 [RSI-9.09]

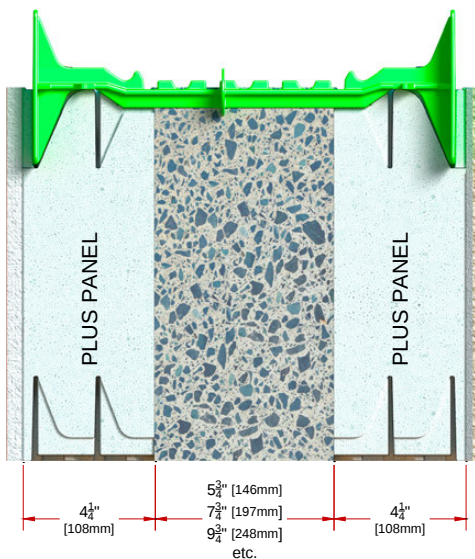

R-38 [RSI-6.44]

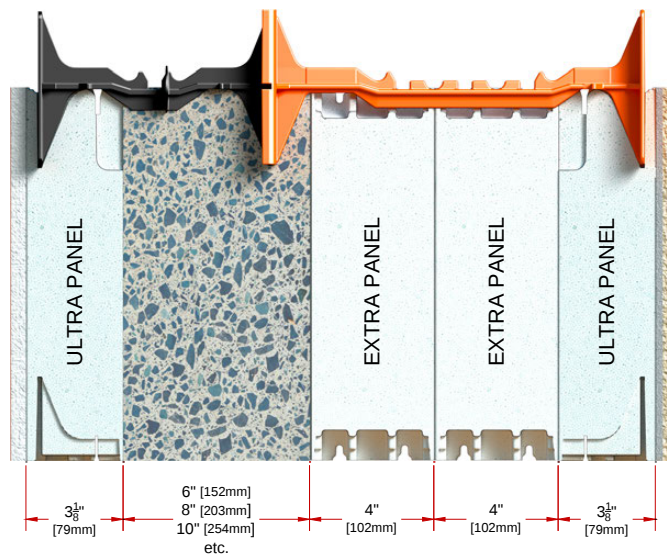


R-59 [RSI-10.13]

Quad-Lock System Components: Ties

Standard Full Ties

Standard Full Ties are injection-molded, high density polyethylene (HDPE). Available in six standard sizes and color-coded for easy identification. See page 14 for packaging and weights.

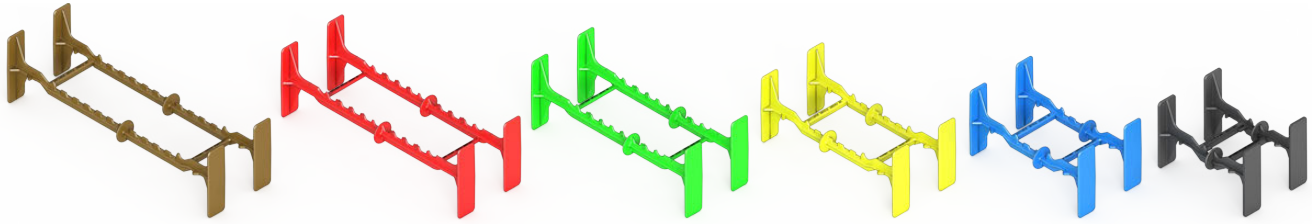

■ **Full Tie – Brown**  *Special Order Item**
18¼" [464mm] total wall width.
30 Ties/pkg. | 14.3lbs [6.5kg]/pkg.
Part #: **FTB 14**

■ **Full Tie – Green**
14¼" [362mm] total wall width.
40 Ties/pkg. | 15.9lbs [7.2kg]/pkg.
Part #: **FTG 10**

■ **Full Tie – Blue**
10¼" [260mm] total wall width.
60 Ties/pkg. | 20.6lbs [9.3kg]/pkg.
Part #: **FTB 6**

■ **Full Tie – Red**  *Special Order Item**
16¼" [413mm] total wall width.
40 Ties/pkg. | 16.7lbs [7.6kg]/pkg.
Part #: **FTR 12**

■ **Full Tie – Yellow**
12¼" [311mm] total wall width.
50 Ties/pkg. | 20.6lbs [9.3kg]/pkg.
Part #: **FTY 8**

■ **Full Tie – Black**  *Special Order Item**
8¼" [210mm] total wall width.
60 Ties/pkg. | 18lbs [8.2kg]/pkg.
Part #: **FTB 4**



*Easily select the correct configurations with the Quad-Lock Estimating Program or www.quadlock.com/estimate
Two Panels and four Ties are referred to as one "Unit" or "Block".*

Wire Top Ties

Wire Top Ties are used in conjunction with the Metal Track to easily finish the top of Quad-Lock walls. They keep the top panels plumb, secure and in position to create a straight wall. They remain hidden below the top of the concrete and hold the top horizontal rebar.

Important Note: The length descriptions of the Wire Top Ties below, i.e. Wire Top Tie - 12", refer to the concrete cavity width created with Regular Panels and Plus Panels (not Ultra), not the actual length of the tie itself or the width of the wall.



■ **Wire Top Tie - 14"**  *Special Order Item**
14" [350mm] Wire Top Tie
100 Ties/pkg. | 22lbs [10kg]/pkg.
Part #: **WTT14**

■ **Wire Top Tie - 10"**
10" [254mm] Wire Top Tie
100 Ties/pkg. | 19lbs [8.6kg]/pkg.
Part #: **WTT10**

■ **Wire Top Tie - 6"**
6" [152mm] Tie
100 Ties/pkg. | 15lbs [6.8kg]/pkg.
Part #: **WTT6**

■ **Wire Top Tie - 12"**  *Special Order Item**
12" [305mm] Wire Top Tie
100 Ties/pkg. | 21lbs [9.5kg]/pkg.
Part #: **WTT12**


■ **Wire Top Tie - 8"**
8" [203mm] Tie
100 Ties/pkg. | 17lbs [7.7kg]/pkg.
Part #: **WTT8**

■ **Wire Top Tie - 4"**
4" [102mm] Tie
100 Ties/pkg. | 13lbs [5.9kg]/pkg.
Part #: **WTT4**

*Special orders or minimal stock - ask for lead times!

Quad-Lock System Components: Ties


Specialty Ties

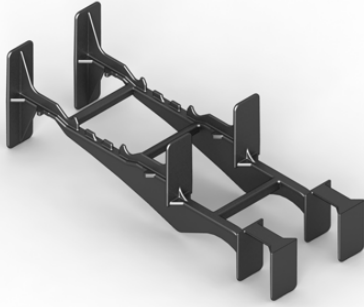

■ Brick Ledge Tie Special Order Item*

The Brick Ledge Tie can be used to create a concrete ledge for brick or stone exterior finishes or as an interior support for floor joists. It easily transitions the wall from a 12" [305mm] concrete cavity to a 6" [152mm] cavity (when used with Regular Panels), leaving a 3¾" [95mm] solid concrete supporting ledge, plus a 2¼" [57mm] high density foam panel capped by galvanized metal track.

15¾" [400mm] Tie
30 Ties/pkg. | 17lbs [7.7Kg]/pkg.
Part #: **BLT**

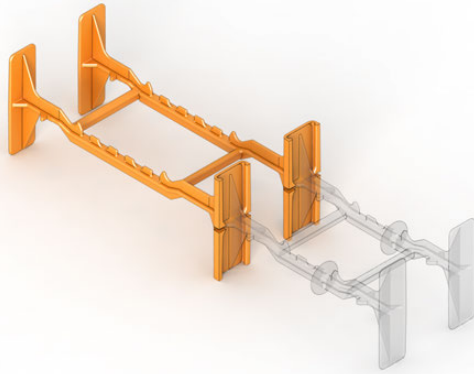

■ Extender Tie Special Order Item*


The Extender Tie will allow builders to create walls of almost any desired concrete thickness. Extender Ties are designed to interlock with regular Full Ties to add exactly 12" [305mm] of concrete cavity. You can also combine multiple Extender Ties with Full Ties to create concrete cavities larger than 24" [610mm].

12" [305mm] Tie
40 Ties/pkg. | 16lbs [7.2kg]/pkg.
Part #: **XT**

Slab Ties & Brackets

■ Slab Ties & Brackets System

Slab Ties, used in combination with Slab Brackets and 2x4 lumber, will provide a solid support system for 1 layer of outside panels during the concrete pour of a floor slab. This system eliminates the need for exterior scaffolding or ladders (shoring is still required to support Quad-Deck). See Quad-Deck Installation Manual for more details.

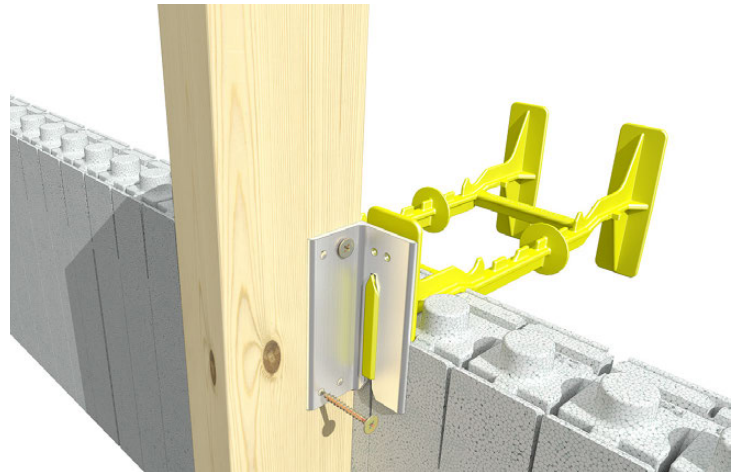


Part#	Descriptor	Material	Dimensions	Packaging	Weight
FTB6S	Blue Slab Tie	HDPE	10" [254mm] Total Width	60/box	22lbs [10kg]/box
FTY8S	Yellow Slab Tie	HDPE	12" [305mm] Total Width	50/box	19lbs [8.6kg]/box
FTG10S	Green Slab Tie	HDPE	14" [356mm] Total Width	40/box	17lbs [7.7kg]/box
FTR12S*	Red Slab Tie	HDPE	16" [406mm] Total Width	40/box	17lbs [7.7kg]/box
FTB14S*	Brown Slab Tie	HDPE	18" [457mm] Total Width	30/box	15lbs [6.8kg]/box
SLABBRACKET*	Slab Bracket	Aluminum	1.5"x4" [38mmx102mm]	Individual	0.137lbs [0.06kg]/ea

*Special orders or minimal stock - ask for lead times!

Quad-Lock System Components: Brackets

Metal Brackets

Metal Brackets are made from galvanized sheet steel and are designed to fit over Quad-Lock Panels. The brackets have holes that match the panels' foam interlock knobs and slots that allow the ties and tie flanges to be inserted once the bracket has been placed over the panels.

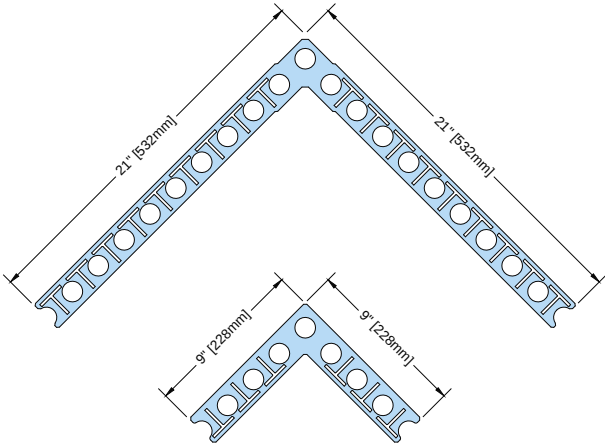

Outside Corner Bracket

The Outside Corner Brackets are used on every row of the outside corner panels (with the exception of the top row) and as reinforcement for the back side of T-walls.


25/pkg. | 11.5lbs [5.2kg]/pkg. | Part #: **CBO**

Single Units Available for Sale

Inside Corner Bracket

The Inside Corner Brackets are used on every row of the inside corner panels (with the exception of the top row) for 90° corners and on the inside corners of T-walls.

50/pkg. | 8.5lbs [3.9kg]/pkg. | Part #: **CBI**

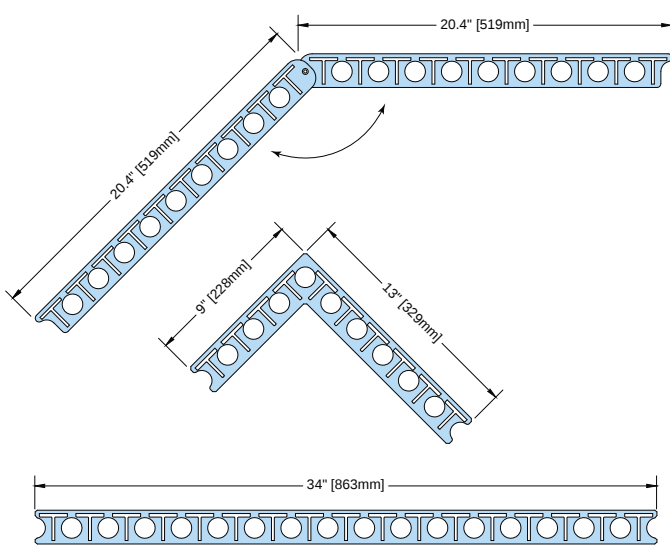

Angle Bracket

Angle Brackets are hinged brackets to allow wall angles of almost any degree to be easily formed and braced. Angle Brackets are only needed on the outside of the angle wall.

50/pkg. | 20lbs [9.1kg]/pkg. | Part #: **CBA**

End Cap Bracket Special Order Item*


End Cap Brackets help to form insulated wall end caps with short panel pieces, replacing lumber formwork & bracing.

50/pkg. | 9.5bs [4.3kg]/pkg. | Part #: **CBW**


Straight Bracket Special Order Item*

Straight Brackets are used at four-way intersections for added support.


50/pkg. | 16lbs [7.3kg]/pkg. | Part #: **CBS**

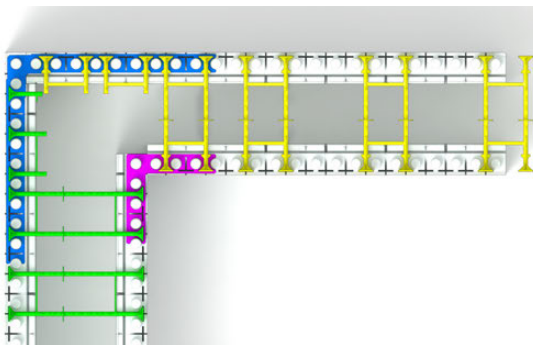

90° Corner



End Wall

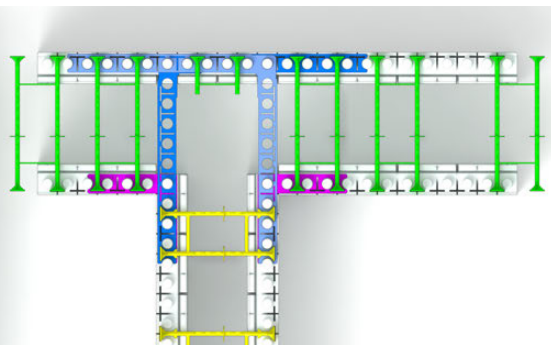

T-Wall




Use 2 outside and 2 inside brackets for reinforcement on T-Walls.

*Special orders or minimal stock - ask for lead times!

Quad-Lock System Components: Track

Metal Track

Metal Tracks are made from galvanized sheet steel and are pre-bent (with the exception of the Flex Tracks) to fit the dimensions of the Quad-Lock Panels to ensure the easy starting and finishing of a wall. Flex-Track allows the builder to create high quality, radius walls, simply and easily.

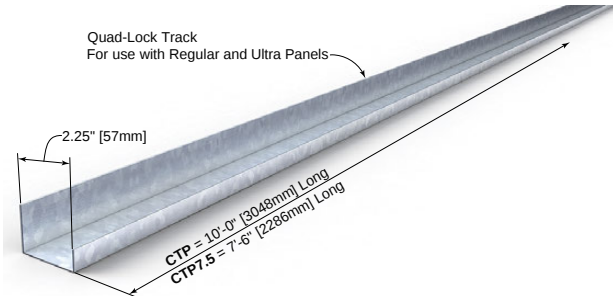


Regular Track

Use with Regular or Ultra Panels

Track is 2¼" [57mm] wide, pre-punched with guide holes for fasteners every 2' [610mm]

Part #: **CTP** - 10' long [3.05m]

10pc/pkg. | 50lbs [22.5kg]/pkg.

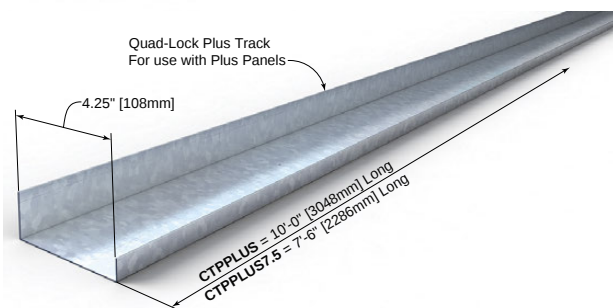

Plus Track

Use with Plus Panels

Track is 4¼" [108mm] wide, pre-punched with guide holes for fasteners every 2' [610mm]


Part #: **CTPPLUS** - 10' long [3.05m]

10pc/pkg. | 75lbs [34kg]/pkg.

Part #: **CTPPLUS7.5** - 7.5' long [2.28m]

On Clearance Sale only from Georgia, USA

10pc/pkg. | 57lbs [26kg]/pkg.

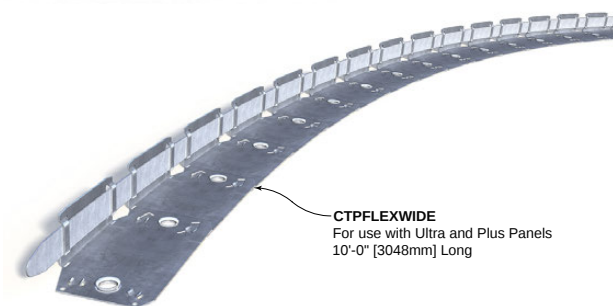

Flex-Track "L" Special Order Item*

Flex-Track "L" is used to secure radius walls. The "L" Flex Track can be used with Ultra and Plus Panels.


2¼" x 10' long [57mm x 3.05m]

1 each | 14lbs [6.4kg]

100/crate

Single Units Available for Sale

Part #: **CTPFLEXWIDE**

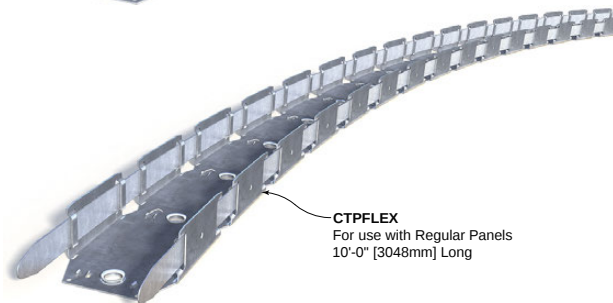

Flex-Track "U" Special Order Item*

Flex-Track "U" is used to secure radius walls. The "U" Flex Track provides added reinforcement and is specifically designed for Regular and FS Panels.


2½" x 10' long [64mm x 3.05m]

1 each | 14lbs [6.4kg]

100/crate

Single Units Available for Sale

Part #: **CTPFLEX**

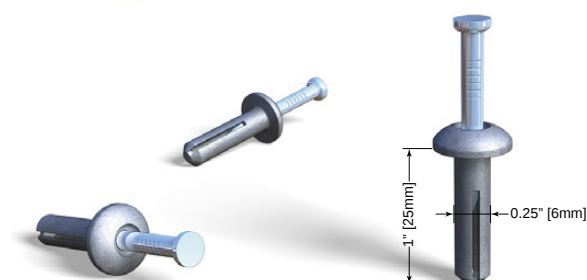

Track Fastener Special Order Item*

Zamac Nail Drive Anchors

¼" x 1¼" [6mm x 31mm]

100/box | 3lbs [1.4kg]/box

Part #: **CTPFASTENER**

*Special orders or minimal stock - ask for lead times!

Quad-Deck

Quad-Deck is a revolutionary Insulating Concrete Form designed to quickly build insulated, lower-mass, reinforced concrete suspended floors and roofs, typically cast-in-place, but also as tilt-up or pre-cast panels. Quad-Deck Panels are made of expanded polystyrene (EPS) insulation molded around perforated, Z-shaped, galvanized metal strips that act as both secondary shoring during construction and as attachment points for finishes. When the concrete has reached sufficient strength and the temporary shoring has been removed, the forms stay in place to function as insulation, space to run utilities, and backing for finishes. Quad-Deck was invented to minimize the building mass, reduce shoring requirements, and increase the speed and efficiency of the construction of floors & roofs of **durable, resilient and sustainable buildings that offer improved Indoor Environmental Quality at lower Total Cost of Ownership** than traditional buildings.

Quad-Deck

Available in any length required, up to a practical max. length of about 35' [10.7m].

Thicknesses from 7" to 12½" [178mm to 318mm]

Width = 2' [610mm]

Concrete beam depth range from 5" to 10½" [127mm to 267mm]

Part #: **See table below.**


Note: This is a product that requires engineering.

A waiver is required to purchase this product.

Quad-Deck is manufactured-to-order requiring 2-3 weeks lead time to ship.



Part #:	QDECK7	QDECK8	QDECK9	QDECK10	QDECK11	QDECK12	QDECK12.5
Panel Thickness	7" [178mm]	8 [203mm]	9 [228mm]	10 [254mm]	11 [279mm]	12 [305mm]	12.5 [318mm]
Insulation	R-16 [U-0.35]	R-19 [U-0.3]	R-22 [U-0.26]	R-25 [U-0.23]	R-28 [U-0.20]	R-32 [U-0.18]	R-33 [0.17]
Weight [psf]	1.10	1.19	1.28	1.37	1.46	1.54	1.59
Weight [kg/m²]	5.37	5.81	6.25	6.69	7.13	7.52	7.76

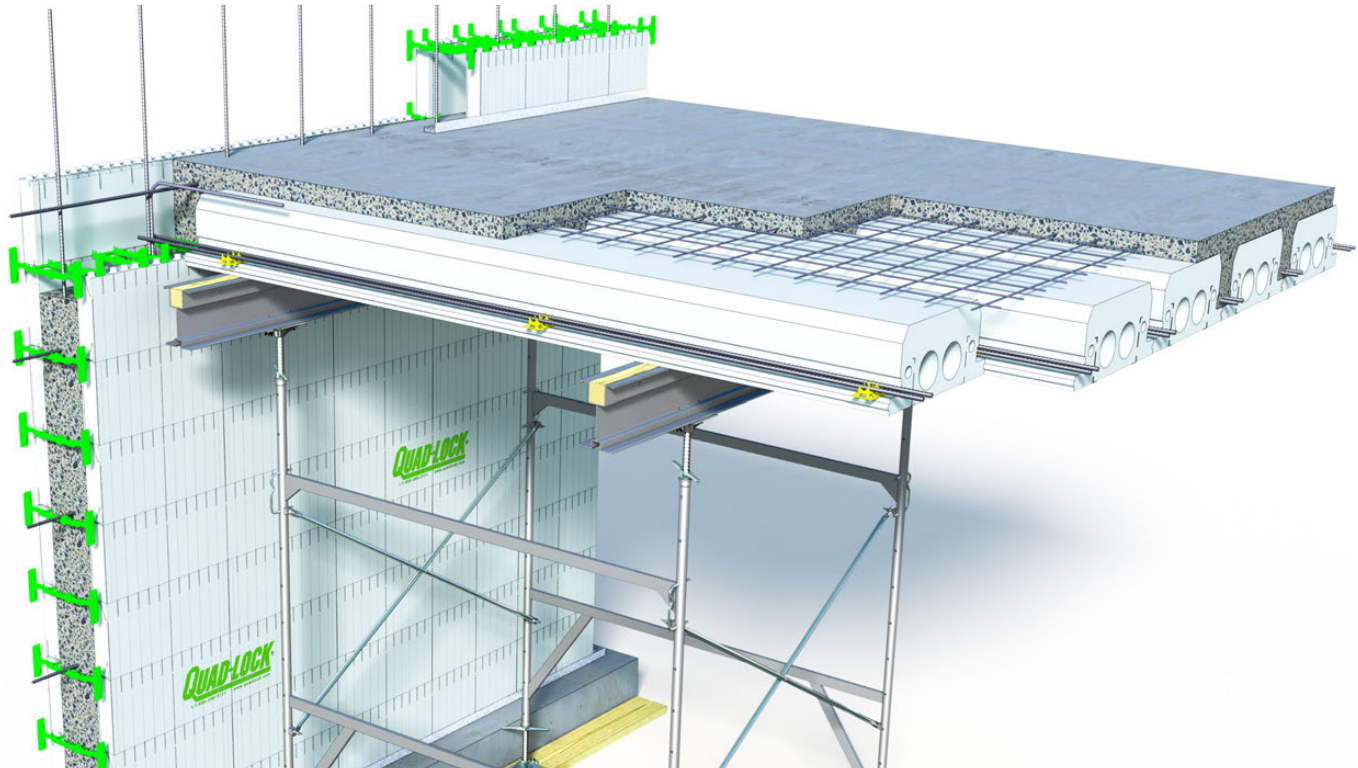


Double Rebar Chairs

Rebar Chairs are designed to provide a clearance of $\frac{3}{4}$ " [19mm] between rebar and the bottom of a beam for minimum concrete encasement (in most cases). Rebar Chairs can be used in conjunction with Quad-Deck T-beam structures or with Quad-Lock walls in forming lintels, beams or other components where minimum concrete encasement is critical.

Recommended maximum aggregate size is $\frac{3}{8}$ " [10mm].

$2\frac{1}{2}$ " x 4" [64mm x 102mm]

Part#: **QDECK RC** 300/box | 13.2lb [5.99kg]/box

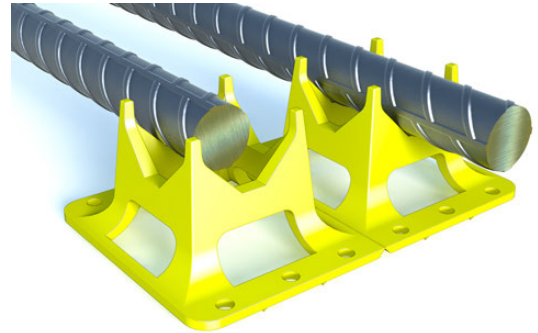

EPS Plugs

Each Quad-Deck order comes with the required amount of EPS Foam Plugs to cover the large holes on both ends of the panels to avoid concrete flow into the chases. Foam Plugs are sized to pressure-fit into holes; adhesive is optional.

$\varnothing 4.75$ " [121mm] x 1" [25mm]


Part#: **QDPlugs**



EPS Tophats

Top hats further increase Quad-Deck's effective beam depth beyond the standard Quad-Deck thicknesses, which in turn increases live load and clear span capacity of the floor or roof system. Custom ordered in any thickness required, they are glued to the tops of Quad-Deck panels at the jobsite. Made from expanded polystyrene (EPS including flame-retardant) usually as ASTM C578 Type VIII for USA or CAN/ULC-S701 Type 2 for Canada.

Part#: **EPS Top Hats**

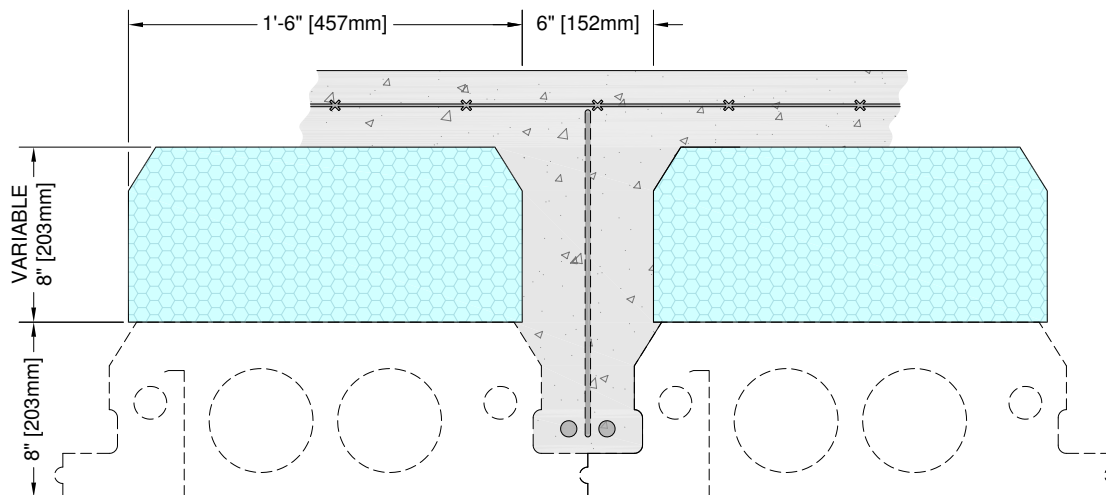

Available Accessories

■ Self-Adhering Membrane


Used for water proofing & damp proofing of below grade walls (this is a Soprema or Resisto product)
75' x 3' x 40mil [22.9m x 0.9m x 1mm]
225sqft [20.9] per roll
Covers 200sqft [18.6sqm] with overlaps
1 Roll | 42lbs [19kg]/roll
Part #: **MDPEEL40S** (summer)
Part #: **MDPEEL40W** (winter)



■ 10ft [3.05m] Quad-Lock Bracing


Used for bracing and alignment of walls
1 Brace | 54lbs [24.5kg] per 3 piece brace.
1 Crate | 32" x 41.3" x 127" [0.81m x 1.05m x 3.23m]
1621lbs [735kg] per crate with 24 braces.
Part #: **PLUMWALL 3**
Note: 4ft [1.2m] extenders are available to extend the brace strongbacks for walls up to 24ft [7.3m] tall.

⚠ Special Order Item*

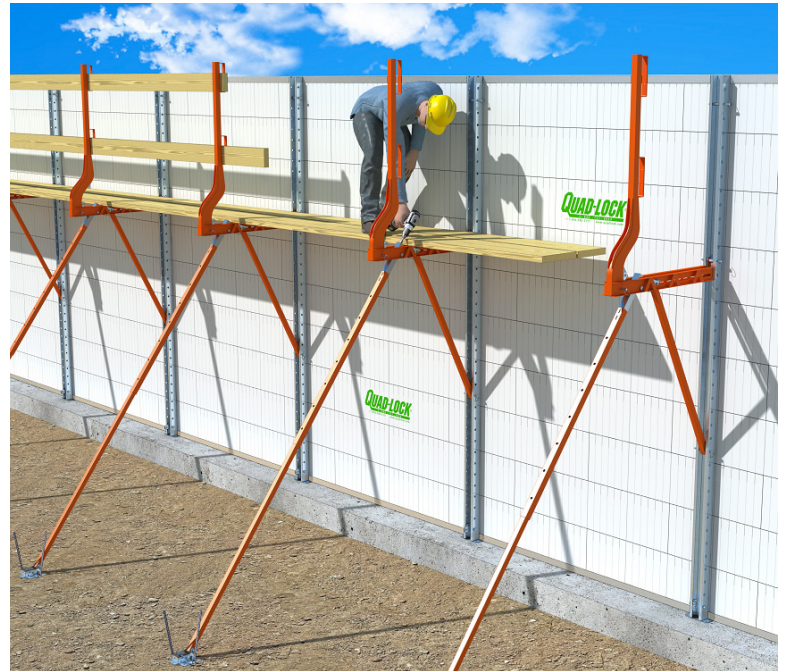


■ Window Fastener (Stucco)

Window Fasteners for stucco applications.
1000/pkg. | 10lbs [4.5kg]/pkg.
Part #: **WIND1-EIFS**

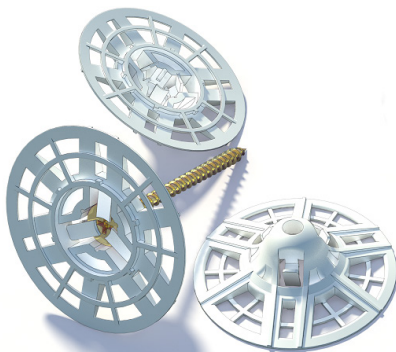

■ Window Fastener (Regular)

Window Fasteners for regular exterior.
1000/pkg. | 6lbs [2.7kg]/pkg.
Part #: **WIND 2**

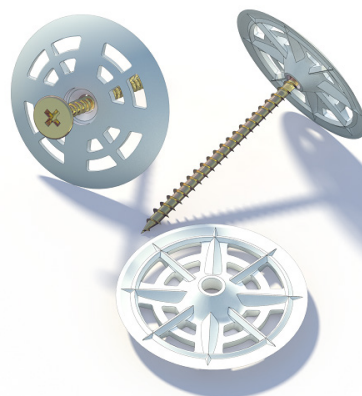


*Special orders or minimal stock - ask for lead times!

Ledger Connections

Ledger Connectors are used to accommodate a multitude of floor connections. The system provides easy, quick and versatile installation of ledgers when using Regular Ultra Panels. Ledger Brackets can also be used for the attachment of interior walls, overhead door attachments, etc.


■ Ledger Hanger-W

1 9/16" [40mm] wide - for solid sawn lumber
15/pkg. | 16lbs [7.25kg]/pkg.
Part #: ICFVL-W

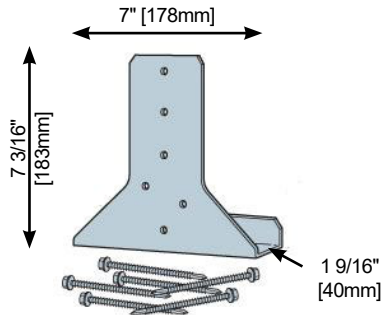



■ Ledger Hanger-LVL (shown below)

1 13/16" [46mm] wide - for solid LVL
15/pkg. | 19lbs [8.6kg]/pkg.
Part #: ICFVL-CW

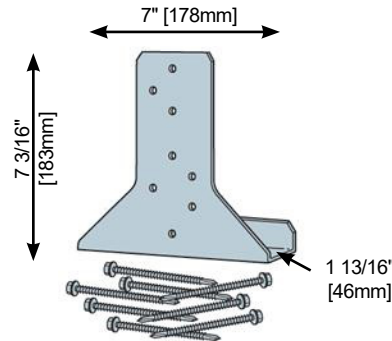

■ Ledger Bracket

Used with ICFVL-W or LVL
15/pkg. | 23lbs [10.4kg]/pkg.
Part #: ICFVL

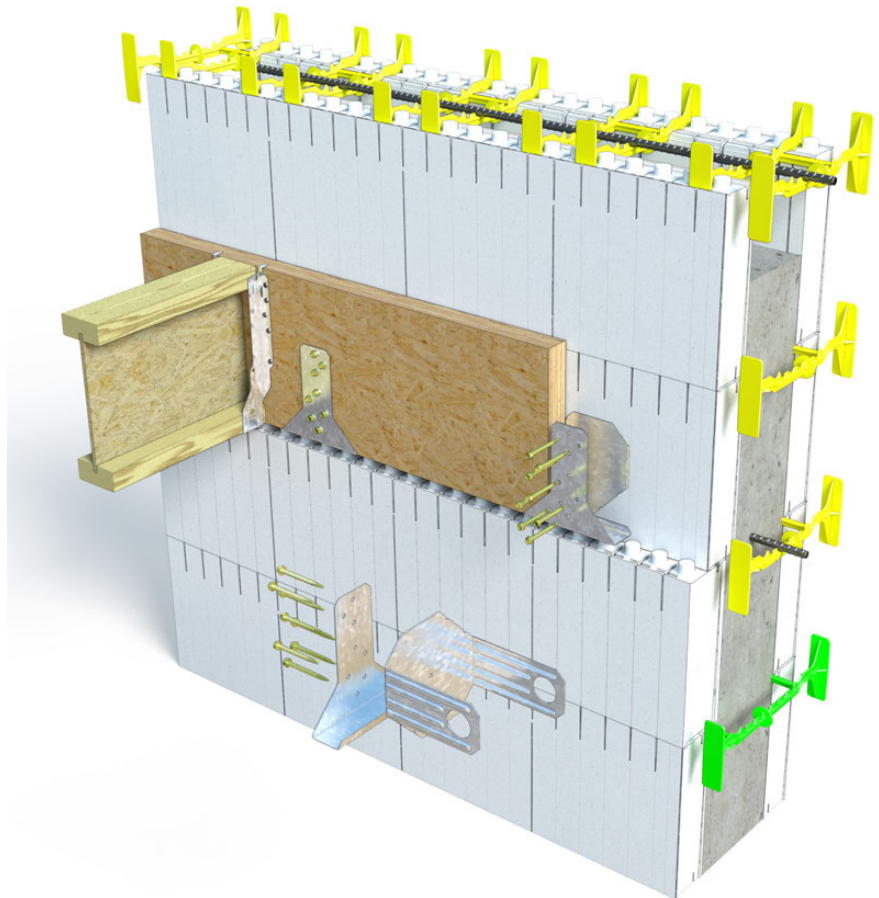

Ordering Quad-Lock Insulated Concrete Forms

Thank you for working on your Quad-Lock order!

Below is a brief guide for a smooth order & delivery process.

Our Terms and Conditions of Sale apply to every order, see www.quadlock.com/terms.

Timeframes:

Preparation: Depending on the amount of planning already done, please expect 2-7 business days to work through the details of your order, such as:

1. updating quantities based on final building plans,
2. getting freight quotes (only valid 1-2 weeks & subject to availability), and
3. arranging payment by check, wire transfer, credit card, or credit application.

Lower freight rates are sometimes available such as intermodal, if you provide more leadtime & flexibility on the date of delivery.

Fulfillment: After the order is signed & payment arranged, it takes 1-3 business days to secure transportation at the quoted rate. Quad-Deck is made-to-order so fulfillment typically takes 4-10 business days. **Special Order items** (e.g. FS and PLUS panels, special ties, bracing, see order form) and multi-truckload orders may require more leadtime, so let us know those needs well in advance.



Best-case timeframe for STOCKED items, e.g. Ultra or Regular panels, common ties, brackets, track:

1. your final order requirements were calculated already & you are available for quick turnaround:
2-3 business days to get freight quotes, finalize the order for signature, and arrange payment
2. Arrange transportation & ship: 1-3 business days
3. Transit time: 1-5 days depending on location

Shipping

Quad-Lock arranges freight for you to ship in 53' dry-van trailers, 53' intermodal containers or mostly 40' high-cube containers for export. We cannot load most non-standard vessels such as reefers, flat-beds, box trucks, moving trucks etc. **Less-Than-Truckload (LTL) shipments are not recommended** for most shipments because they require re-loading which often leads to damage to your products, and residential/jobsite deliveries can incur high surcharges.

Delivery - What to expect: Quad-Lock uses large trucks of common carriers for transportation services, so their rules apply to your shipment. An important one is that **you are responsible for site accessibility & unloading products in a timely manner (typically max. 2 hours for truckloads)**, with additional charges becoming payable by you for any delays, revised instructions, or other undisclosed special situations. 4-5 workers can usually unload a truck by hand at a jobsite within the 2 hours and they should **wear sturdy gloves & clothes** to prevent cuts from metal parts. Another important rule is that delay/cancelation of a truck once booked can result in charges as high as the freight quote. Liftgate, driver assistance etc. are not available at delivery without special arrangements & costs.

Delivery Appointment: For full or partial truckload shipments, carriers are instructed to setup a delivery appointment with you at least 24 hours before expected arrival. For LTL shipments, this service costs extra so you will have to be available for unloading on short notice or request that service.

We look forward to working with you to meet your and your customers' needs.

Shipping Configurations

Shipping Information:

- A 53' Truckload holds 26 pallets (24 pallets when it is not top-loaded)



Quad-Lock and Quad-Deck Trailer/Container Loading Amounts

	53 foot [16.1m] Trailer		40 ft [12.2m] High Cube Container		EURO Trailer	
	sqft	sqm	sqft	sqm	sqft	sqm
R-22 [U-0.28] Wall	7320	680	4960	460	5240	485
R-28 [U-0.21] Wall	5450	505	3680	341	3920	364
7" [178mm] Quad-Deck	6000	557	3900	362	4200	390
8" [203mm] Quad-Deck	5200	483	3400	315	3700	343
9" [228mm] Quad-Deck	4400	408	2900	269	3300	306
10" [254mm] Quad-Deck	4000	371	2600	241	3000	278
11" [279mm] Quad-Deck	3600	334	2300	213	2700	250
12" [305mm] Quad-Deck	3200	297	2100	195	2400	222
12.5" [318mm] Quad-Deck	3200	297	2100	195	2400	222

NOTES:

The quantities above may vary due to loading procedures and the amount of accessories loaded; they are for estimating purposes only. For exact load calculations, please use the "Product Order Form" on the Estimating Program. All quantities are calculated under the assumption that vessels are top-loaded. Quad-Lock reserves the right to change the contents and form of this document, at any time, without prior notice.

Sample Orders for 53' [16.1m] Trailer (Dry Van)


R-22 [U-0.28] Wall Assembly

Quantity:	Part #	Description
1830	QPX2	Quad-Lock Regular Panel Pairs
6960	FTB6	Quad-Lock Blue Ties
152	CBO	Inside Corner Brackets
152	CBI	Outside Corner Brackets
400	WTT6	Wire Top Tie 6"
142	CTP	Track, 2.25" Wide x 10ft Long
1000	WIND2	Window Fastener (plastic washers)

R-28 [U-0.21] Wall Assembly

Quantity:	Part #	Description
1300	QPX3	Quad-Lock Ultra Panel Pairs
64	QPX3CORNER	Quad-Lock Ultra Corner Panel Pairs
5200	FTY8	Quad-Lock Yellow Ties
114	CBO	Inside Corner Brackets
114	CBI	Outside Corner Brackets
300	WTT8	Wire Top Tie 8"
106	CTP	Track, 2.25" Wide x 10ft Long
1000	WIND2	Window Fastener (plastic washers)

Pallet Specifications

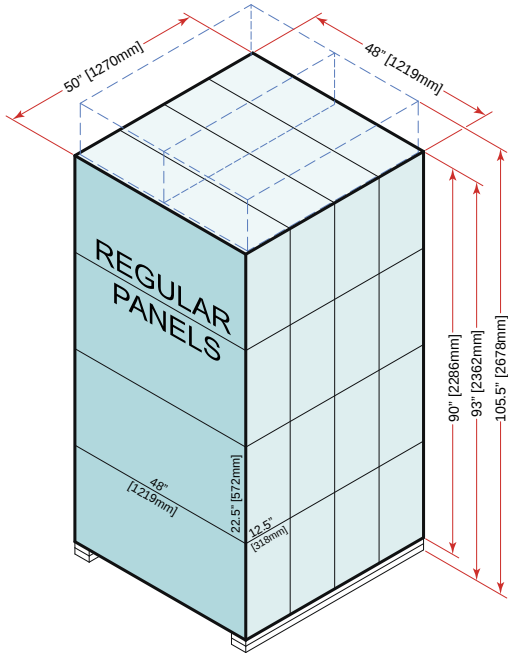


Regular Panel Pair - Green Bags

Weight per bag = 6.5kg [14.3lbs] = 5 units
 Bag = 48" x 12½" x 22½" [1219mm x 318mm x 572mm]
 Weight per pallet = 104kg [229.3lbs] - 16 bags

Regular FS Panel Pairs - Black Bags

Packaging same as for Regular Panels
 Weight per bag = 7.5kg [16.5lbs] = 5 units
 Weight per pallet = 120kg [264lbs] - 16 bags

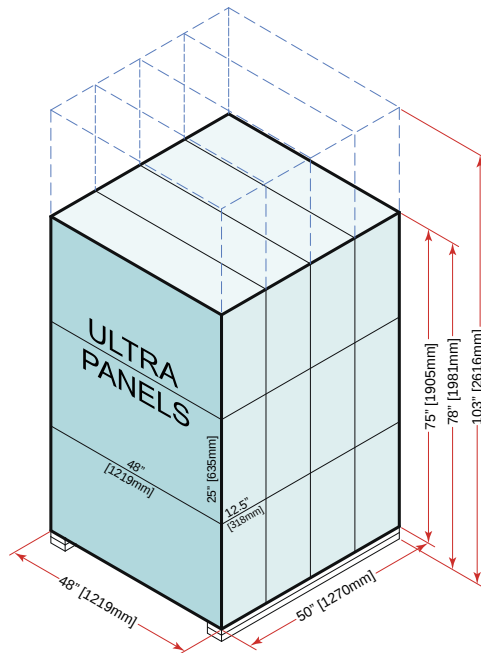


Ultra Panel Pairs - Red Bags

Weight per bag = 5.36kg [11.8lbs] - 4 units
 Bag = 48" x 12½" x 25" [1219mm x 318mm x 635mm]
 Weight per pallet = 64.3kg [142lbs] - 12 bags

Ultra Corner Panel Pairs - Purple Bags

Packaging and weights same as for Ultra Panels

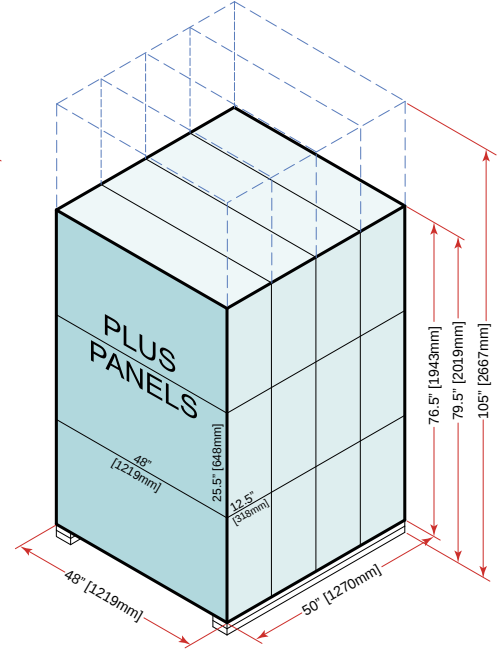


Plus Panel Pairs - Orange Bags

Weight per bag = 5.7kg [12.7lbs] - 3 units
 Bag = 48" x 12½" x 25½" [1219mm x 318mm x 648mm]
 Weight per pallet = 68.4kg [151lbs] - 12 bags


Plus FS Panel Pairs - Brown Bags

Packaging same as for Regular Panels
 Weight per bag = 6.3kg [13.9lbs] = 3 units
 Weight per pallet = 76kg [167lbs] - 12 bags

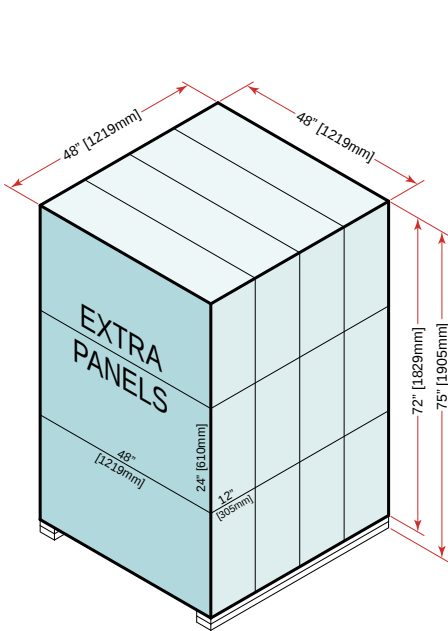

Extra Panel Pairs - Blue Bags

Weight per bag = 4.2kg [9.3lbs] - 6 panels
 Bag = 48" x 12" x 24" [1219mm x 305mm x 610mm]
 Weight per pallet = 50kg [112lbs] - 12 bags

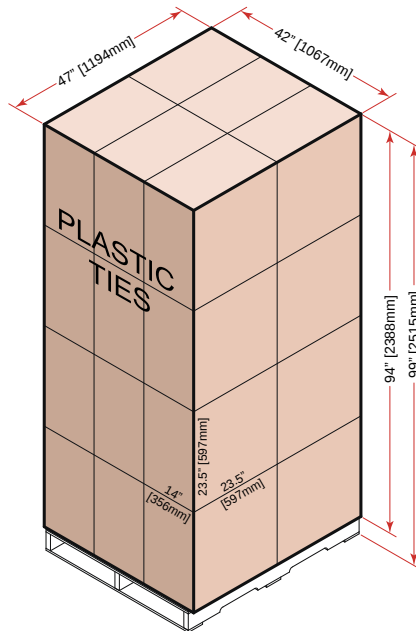

Ties - Brown Cardboard Boxes

Weight per box varies, see pg. 6
 Dimensions per box = 23½" x 14" x 23½" [597mm x 356mm x 597mm]

Quad-Lock Order Form


Enter information in light green fields	Bill To:	
	Contact:	
	Company:	
	Address:	
	City, State, ZIP:	
	Telephone:	
Orange Highlights are special order items or minimal stock - ask for lead times!	Fax:	
	Email:	
	Ship To:	
	Contact:	
	Company:	
	Address:	
	City, State, ZIP:	
	Telephone (#2):	
	Telephone (#2):	
	Email:	

Quote Number	
Order Date:	
PO #:	
Our SO#:	
Required By:	
Truck / Container Type:	53' SEMI Trailer (Dry Van)
Cost per Vessel	\$
Freight to Allocate:	\$
Top Loading:	Yes
Filled 0%	0 Total Packs
	0 lbs Total Weight
Use this product as FILLER: (if none is given, we will ship "AS IS" - not filling up truck/container)	
Shipping to be arranged by:	Quad-Lock
(if not indicated, we assume that customer arranges shipping)	


Add or Subtract Units	Units Ordered	Part #	Description	Units/Pkg	Packs	\$ per Unit	Extended Price \$
Quad-Lock Wall ICF, Ex-Works			NOTE: Items highlighted orange are special orders or minimal stock - ask for lead times!				
		QPX3	Ultra Panel Pair, 3.125" thick	(=0 panels) 4	pairs		
		QPX3CORNER	Ultra CORNER Panel Pair, 3.125" thick	(=0 panels) 4	pairs		
		QPX2	Regular Panel Pair, 2.25" thick - expert installers only	(=0) 5	pairs		
		QPX2PLUS	Plus Panel Pair, 4.25" thick	(=0 panels) 3	pairs		
		QPX2FS	Regular FS Panel Pair, Fastening Strips 1' oc - experts	(=0 panels) 5	pairs		
		QPX2PLUSFS	Plus FS Panel Pair, Fastening Strips 1' oc	(=0 panels) 3	pairs		
		QPEXTRA	Extra Panels, 4" thick, for use inside QPX	(= panels) 6	pcs		
		FTB4	Black Ties, 8" overall wall thickness (works only w/ QPX2)	60	ties		
		FTB6	Blue Ties, 10" overall wall thickness	60	ties		
		FTY8	Yellow Ties, 12" overall wall thickness	50	ties		
		FTG10	Green Ties, 14" overall wall thickness	40	ties		
		FTR12	Red Ties, 16" overall wall thickness	40	ties		
		FTB14	Brown Ties, 18" overall wall thickness	30	ties		
		CBI	Inside Corner Brackets - 22 gauge galvanized steel	50	pcs		
		CBO	Outside Corner Brackets - 20 gauge galvanized steel	25	pcs		
		CBA	Angle Bracket - galvanized steel	50	pcs		
		CBW	Endcap Bracket	50	pcs		
		CBS	Straight Bracket, for fourway intersections	50	pcs		
		FTB6S	Blue SLAB Ties, 10" wall thickness, connects to Slab Bracket	60	ties		
		FTY8S	Yellow SLAB Ties, 12" wall thickness, connects to Slab Bracket	50	ties		
		FTG10S	Green SLAB Ties, 14" wall thickness, connects to Slab Bracket	40	ties		
		FTR12S	Red SLAB Ties, 16" wall thickness, connects to Slab Bracket	40	ties		
		FTB14S	Brown SLAB Ties, 18" wall thickness, connects to Slab Bracket	30	ties		
		SLAB BRACKET	Slab Bracket, connects SLAB Ties and lumber	300	pcs		
		XT	Extender Tie, orange, adds 12" to concrete cavity of Full Tie	40	ties		
		BLT	Brick Ledge Tie, magenta, 12" to 6" transition, creates 4" concrete ledge	30	ties		
Quad-Lock Wall ICF Accessories, Ex-Works							
		WTT4	Wire Top Tie, 4" concrete	100	ties		
		WTT6	Wire Top Tie, 6" concrete (4" w/ 3" Panels)	100	ties		
		WTT8	Wire Top Tie, 8" concrete (6" w/ 3" Panels)	100	ties		
		WTT10	Wire Top Tie, 10" concrete (8" w/ 3" Panels)	100	ties		
		WTT12	Wire Top Tie, 12" concrete (10" w/ 3" Panels)	100	ties		
		WTT14	Wire Top Tie, 14" concrete (12" w/ 3" Panels)	100	ties		
		CTP	Track, 2 1/4" wide, 10" long, for 2" and 3" Panels	(0 ft total) 10	pcs/bdl		
		CTPPLUS	Track, 4 1/4" wide, 10" long, for 4" Panels	(0 ft total) 10	pcs/bdl		
		CTPFLEX	Radius Track U-Shape for 2" Panels, 10' long	(0 ft total) 1	pc		
		CTPFLEXWIDE	Radius Track L-Shape for 3" and 4" Panels, 10' long	(0 ft total) 1	pc		
		CTPFASTENER	Zamac Nail Drive Fastener for Track (100/box)	(0 pcs total) 100	pcs		
		MDPEEL40S	Peel&Stick Membrane 40mil summer-grade, 225sqft, covers ~200sqft	1	roll		
		WIND1EIFS	Window Fastener for EIFS/stucco applications	1000	pcs		
		WIND2	Window Fastener	1000	pcs		
		ICFVL	Simpson Ledger Bracket	15	pcs		
		ICFVL-W	Simpson Ledger Hanger, 1 9/16" wide, solid sawn 2x ledger	15	pcs		
		ICFVL-CW	Simpson Ledger Hanger, 1 13/16" wide, LVL ledger	15	pcs		
Quad-Deck® Floor, Roof & Tilt-Up ICF (made-to-order), Ex-Works			Deck Prices decrease for higher quantities.				
		QDECK7	Joist / Deck Forming System, 7" thick, 2' wide		sqft		
		QDECK8	Joist / Deck Forming System, 8" thick, 2' wide		sqft		
		QDECK9	Joist / Deck Forming System, 9" thick, 2' wide		sqft		
		QDECK10	Joist / Deck Forming System, 10" thick, 2' wide		sqft		
		QDECK11	Joist / Deck Forming System, 11" thick, 2' wide		sqft		
		QDECK12	Joist / Deck Forming System, 12" thick, 2' wide		sqft		
		QDECK12.5	Joist / Deck Forming System, 12.5" thick, 2' wide		sqft		
		QDECKRC	Double-Rebar Chair, 2.5" x 4", fits in joist/beams	300	pcs		
		EPS Top Hats	Tophats: EPS Blocks for deep joists (8"-made to spec)	8	1	pcs	
Miscellaneous Special Order Items, Ex-Works OEM (add'l freight & leadtime)							
		Plumwall 3	10ft Bracing	1	rack of 24		

Special Instructions: Typical Lead Times: see www.quadlock.com/order-process The Terms & Conditions of Sale are set forth at www.quadlock.com/terms Authorized Signature: Name & Title:	Subtotal: Taxes: Freight: Taxes on Freight: Order Total (\$) Date: Thursday, May 18, 2017
---	---

Technical Information & Reference Guides



- **Quad-Lock Installation Manual:**
This is the 'premier reference source' providing detailed specifications, engineering information and installation instructions on Quad-Lock.
Price: \$5USD ea.
Part #: **PG-Manual**



- **Quad-Deck Design Manual:**
This is the complete reference source for all aspects of Quad-Deck design, providing detailed technical specifications and engineering information on Quad-Deck.
Price: \$3USD ea.
Part #: **PG-QD-Manual**



- **Quad-Lock Basic Installation Guide**
Handy step-by-step guide to the installation of Quad-Lock. Details include estimating, preparation, footings, pouring, bracing, accessories, etc.
Price: 50 for \$10USD
Part #: **PG-Install**
Available in **English, Spanish & German**



- **Quad-Lock Technical Bulletins:**
Various Technical Bulletins are available on Quad-Lock's web-site or from the marketing department. Check the web-site for the complete library
Part #: **PM-Bulletin**



- **Quad-Lock & Quad-Deck Estimating Program:**
This program provides accurate and detailed job estimates for Quad-Lock projects. Estimates are also done for concrete, rebar and labor. Customer orders can be generated from the software, streamlining the take-off and order process. (Requires MS Excel 2000 or higher)



You can download and print the Quad-Lock or Quad-Deck Product Manuals directly from Quad-Lock's website.

* For Tilt-up estimates, contact Quad-Lock's Training & Technical Services Department.





North America:

19402 - 56 Ave
Surrey, BC V3S 6K4 Canada
www.quadlock.com

Tel: 604.590.3111 Toll Free: 888.711.5625

Fax: 604.534.1212

Email: info@quadlock.com

Europe:

Blumenstr. 1
80331 München, Germany
www.quadlock.de

Tel: +49 (0) 89.260.3066

Fax: +49 (0) 89.260.8471

Email: service@quadlock.de

